




调心滚子轴承 Spherical Roller Bearings

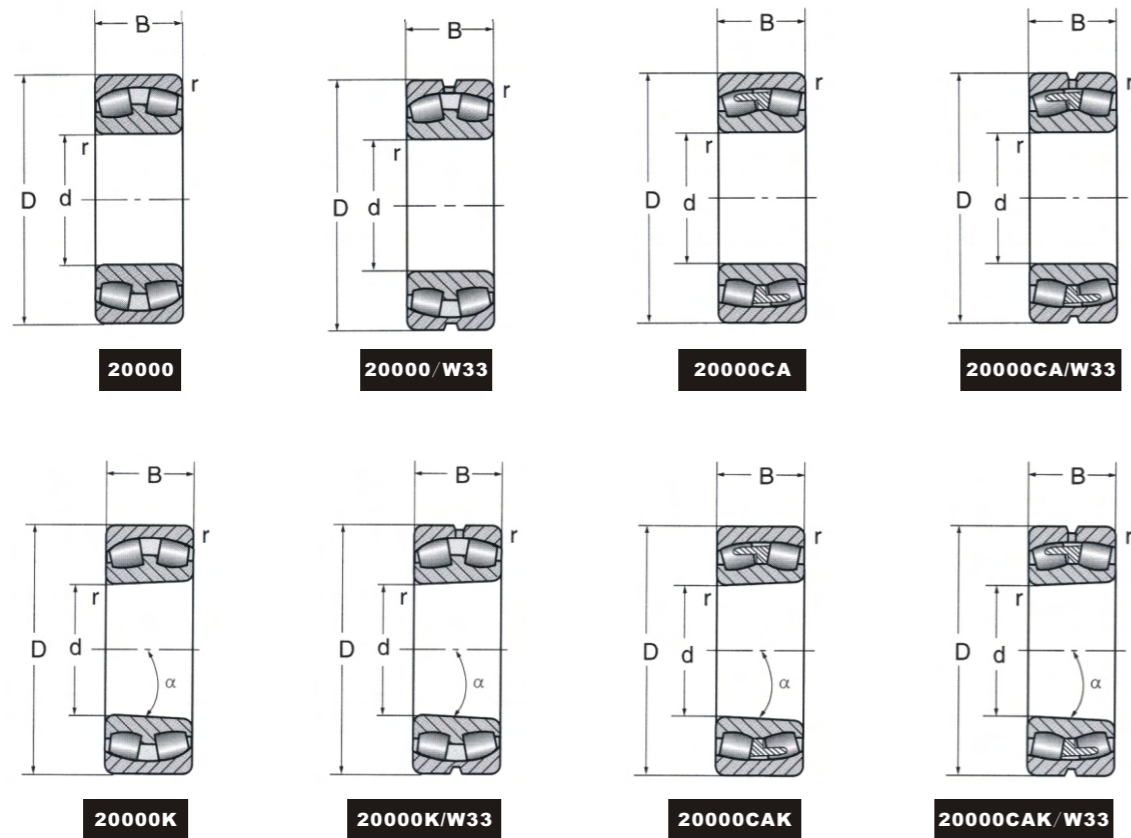

调心滚子轴承 Spherical Roller Bearings

外形尺寸(毫米) Boundary dimensions (mm)				基本额定负荷 (千牛) Basic load ratings (kN)		极限转速(转/分) Speed rating (rpm)		型号 Designations	重量 (千克) Weight (kg)	
d	D	B	r _{min}	Cr	Cor	脂润滑 Grease	油润滑 Oil			
25	52	18	1	35.6	38	7500	10000	22205CA	0.184	
	52	18	1	35.6	38	7500	10000	22205CA/W33	0.178	
	52	18	1	35.6	38	7500	10000	22205CAK	0.181	
30	62	20	1	48.5	58	6000	9000	22206CA	0.295	
	62	20	1	48.5	58	6000	9000	22206CA/W33	0.292	
	62	20	1	48.5	58	6000	9000	22206CAK	0.290	
	62	20	1	48.5	58	6000	9000	22206CAK/W33	0.289	
35	72	23	1.1	68.5	82	5000	8000	22207CA	0.450	
	72	23	1.1	68.5	82	5000	8000	22207CA/W33	0.448	
	72	23	1.1	68.5	82	5000	8000	22207CAK	0.448	
	72	23	1.1	68.5	82	5000	8000	22207CAK/W33	0.440	
40	80	23	1.1	56	76.5	4500	7500	22208	0.600	
	80	23	1.1	56	76.5	4500	7500	22208/W33	0.589	
	80	23	1.1	56	76.5	4500	7500	22208K	0.580	
	80	23	1.1	56	76.5	4500	7500	22208K/W33	0.576	
	80	23	1.1	71.5	93	4500	7500	22208CA	0.568	
	80	23	1.1	71.5	93	4500	7500	22208CA/W33	0.567	
	80	23	1.1	71.5	93	4500	7500	22208CAK	0.567	
	90	33	1.5	106	136	4200	5600	22308CA	0.924	
	90	33	1.5	106	136	4200	5600	22308CAK	0.901	
	90	33	1.5	106	136	4200	5600	22308CAK/W33	0.877	
	45	85	23	1.1	56.5	78.5	5300	6700	22209	0.616
		85	23	1.1	56.5	78.5	5300	6700	22209/W33	0.583
85		23	1.1	56.5	78.5	5300	6700	22209K	0.582	
85		23	1.1	56.5	78.5	5300	6700	22209K/W33	0.571	
85		23	1.1	80.5	95	5300	6700	22209CA	0.629	
85		23	1.1	80.5	95	5300	6700	22209CA/W33	0.628	
85		23	1.1	80.5	95	5300	6700	22209CAK	0.618	
100		36	1.5	98.5	121	3800	4800	22309	1.360	
100		36	1.5	98.5	121	3800	4800	22309/W33	1.340	
100		36	1.5	98.5	121	3800	4800	22309K	1.320	
100		36	1.5	98.5	121	3800	4800	22309K/W33	1.310	
100		36	1.5	134	179	3800	4800	22309CA	1.580	
100		36	1.5	134	179	3800	4800	22309CA/W33	1.580	
100		36	1.5	134	179	3800	4800	22309CAK	1.550	
100		36	1.5	134	179	3800	4800	22309CAK/W33	1.540	

调心滚子轴承 Spherical Roller Bearings

外形尺寸(毫米) Boundary dimensions (mm)				基本额定负荷 (千牛) Basic load ratings (kN)		极限转速(转/分) Speed rating (rpm)		型号 Designations	重量 (千克) Weight (kg)
d	D	B	r _{min}	Cr	Cor	脂润滑 Grease	油润滑 Oil		
50	90	23	1.1	78.5	108	5000	6300	22210CA	0.692
	90	23	1.1	78.5	108	5000	6300	22210CA/W33	0.690
	90	23	1.1	78.5	108	5000	6300	22210CAK	0.690
	90	23	1.1	78.5	108	5000	6300	22210CAK/W33	0.678
55	110	40	2	122	167	3400	4300	22310	1.810
	110	40	2	122	167	3400	4300	22310/W33	1.780
	110	40	2	122	167	3400	4300	22310K	1.760
	110	40	2	122	167	3400	4300	22310K/W33	1.730
60	110	40	2	162	221	3400	4300	22310CA	1.810
	110	40	2	162	221	3400	4300	22310CA/W33	1.780
	110	40	2	162	221	3400	4300	22310CAK	1.760
	110	40	2	162	221	3400	4300	22310CAK/W33	1.730
55	100	25	1.5	80	114	4500	5600	22211	0.917
	100	25	1.5	80	114	4500	5600	22211/W33	0.917
	100	25	1.5	80	114	4500	5600	22211K	0.897
	100	25	1.5	80	114	4500	5600	22211K/W33	0.895
	100	25	1.5	95.5	131	4500	5600	22211CA	0.898
	100	25	1.5	95.5	131	4500	5600	22211CA/W33	0.896
	100	25	1.5	95.5	131	4500	5600	22211CAK	0.880
	100	25	1.5	95.5	131	4500	5600	22211CAK/W33	0.878
	120	43	2	150	196	3200	4000	22311	2.300
	120	43	2	150	196	3200	4000	22311/W33	2.290
	120	43	2	150	196	3200	4000	22311K	2.250
	120	43	2	150	196	3200	4000	22311K/W33	2.230
	120	43	2	189	260	3200	4000	22311CA	2.410
	120	43	2	189	260	3200	4000	22311CA/W33	2.390
	120	43	2	189	260	3200	4000	22311CAK	2.360
	120	43	2	189	260	3200	4000	22311CAK/W33	2.340
60	110	28	1.5	84.5	125	4000	5000	22212	1.190
	110	28	1.5	84.5	125	4000	5000	22212/W33	1.180
	110	28	1.5	84.5	125	4000	5000	22212K	1.170
	110	28	1.5	84.5	125	4000	5000	22212K/W33	1.160
	110	28	1.5	113	158	4000	5000	22212CA	1.210
	110	28	1.5	113	158	4000	5000	22212CA/W33	1.200
	110	28	1.5	113	158	4000	5000	22212CAK	1.200
	110	28	1.5	113	158	4000	5000	22212CAK/W33	1.190

调心滚子轴承 Spherical Roller Bearings

外形尺寸(毫米) Boundary dimensions (mm)				基本额定负荷 (千牛) Basic load ratings (kN)		极限转速(转/分) Speed rating (rpm)		型号 Designations	重量 (千克) Weight (kg)
d	D	B	r _{min}	Cr	Cor	脂润滑 Grease	油润滑 Oil		
60	130	46	2.1	174	228	3000	3800	22312	2.930
	130	46	2.1	174	228	3000	3800	22312/W33	2.910
	130	46	2.1	174	228	3000	3800	22312K	2.860
	130	46	2.1	174	228	3000	3800	22312K/W33	2.840
	130	46	2.1	212	310	3000	3800	22312CA	3.000
	130	46	2.1	212	310	3000	3800	22312CA/W33	2.800
	130	46	2.1	212	310	3000	3800	22312CAK	2.930
	130	46	2.1	212	310	3000	3800	22312CAK/W33	2.730
65	140	33	2.1	182	228	2800	3600	21313	2.550
	120	31	1.5	130	188	3800	4800	22213	1.600
	120	31	1.5	130	188	3800	4800	22213/W33	1.580
	120	31	1.5	130	188	3800	4800	22213K	1.570
	120	31	1.5	130	188	3800	4800	22213K/W33	1.550
	120	31	1.5	135	196	3800	4800	22213CA	1.630
	120	31	1.5	135	196	3800	4800	22213CA/W33	1.610
	120	31	1.5	135	196	3800	4800	22213CAK	1.600
	120	31	1.5	135	196	3800	4800	22213CAK/W33	1.580
	140	48	2.1	189	254	2600	3400	22313	3.820
	140	48	2.1	189	254	2600	3400	22313/W33	3.770
	140	48	2.1	189	254	2600	3400	22313K	3.690
70	140	48	2.1	189	254	2600	3400	22313K/W33	3.640
	140	48	2.1	243	340	2600	3400	22313CA	3.580
	140	48	2.1	243	340	2600	3400	22313CA/W33	3.480
	140	48	2.1	243	340	2600	3400	22313CAK	3.500
	140	48	2.1	243	340	2600	3400	22313CAK/W33	3.400
	150	35	2.1	214	276	2600	3400	21314CA	3.070
	125	31	1.5	124	190	3600	4500	22214	1.540
	125	31	1.5	124	190	3600	4500	22214/W33	1.520
70	125	31	1.5	124	190	3600	4500	22214K	1.520
	125	31	1.5	124	190	3600	4500	22214K/W33	1.510
	125	31	1.5	153	232	3600	4500	22214CA	1.540
	125	31	1.5	153	232	3600	4500	22214CA/W33	1.520
	125	31	1.5	153	232	3600	4500	22214CAK	1.530
	125	31	1.5	153	232	3600	4500	22214CAK/W33	1.510
	150	51	2.1	224	299	2400	3200	22314	4.250
	150	51	2.1	224	299	2400	3200	22314/W33	4.200

调心滚子轴承 Spherical Roller Bearings

外形尺寸(毫米) Boundary dimensions (mm)				基本额定负荷 (千牛) Basic load ratings (kN)		极限转速(转/分) Speed rating (rpm)		型号 Designations	重量 (千克) Weight (kg)	
d	D	B	r _{min}	Cr	Cor	脂润滑 Grease	油润滑 Oil			
70	150	51	2.1	224	299	2400	3200	22314K	4.170	
	150	51	2.1	224	299	2400	3200	22314K/W33	4.120	
	150	51	2.1	300	380	2400	3200	22314CA	4.470	
	150	51	2.1	300	380	2400	3200	22314CA/W33	4.370	
	150	51	2.1	300	380	2400	3200	22314CAK	4.390	
	150	51	2.1	300	380	2400	3200	22314CAK/W33	4.290	
75	130	31	1.5	128	201	3400	4300	22215	1.730	
	130	31	1.5	128	201	3400	4300	22215/W33	1.720	
	130	31	1.5	128	201	3400	4300	22215K	1.690	
	130	31	1.5	128	201	3400	4300	22215K/W33	1.680	
	130	31	1.5	153	235	3400	4300	22215CA	1.800	
	130	31	1.5	153	235	3400	4300	22215CA/W33	1.800	
	130	31	1.5	153	235	3400	4300	22215CAK	1.770	
	130	31	1.5	153	235	3400	4300	22215CAK/W33	1.760	
	160	55	2.1	250	360	2200	3000	22315	5.340	
	160	55	2.1	250	360	2200	3000	22315/W33	5.290	
	160	55	2.1	250	360	2200	3000	22315K	5.220	
	160	55	2.1	250	360	2200	3000	22315K/W33	5.170	
	160	55	2.1	325	455	2200	3000	22315CA	5.440	
	160	55	2.1	325	455	2200	3000	22315CA/W33	5.350	
	160	55	2.1	325	455	2200	3000	22315CAK	5.320	
	160	55	2.1	325	455	2200	3000	22315CAK/W33	5.230	
	80	140	33	2	133	210	3200	4000	22216	2.130
		140	33	2	133	210	3200	4000	22216/W33	2.130
140		33	2	133	210	3200	4000	22216K	2.110	
140		33	2	133	210	3200	4000	22216K/W33	2.080	
140		33	2	171	264	3200	4000	22216CA	2.300	
140		33	2	171	264	3200	4000	22216CA/W33	2.280	
80	140	33	2	171	264	3200	4000	22216CAK	2.280	
	170	58	2.1	290	415	2000	2800	22316	6.240	
	170	58	2.1	290	415	2000	2800	22316/W33	6.070	
	170	58	2.1	290	415	2000	2800	22316K	6.100	

调心滚子轴承 Spherical Roller Bearings

外形尺寸(毫米) Boundary dimensions (mm)				基本额定负荷 (千牛) Basic load ratings (kN)		极限转速(转/分) Speed rating (rpm)		型号 Designations	重量 (千克) Weight (kg)	
d	D	B	r _{min}	Cr	Cor	脂润滑 Grease	油润滑 Oil			
80	170	58	2.1	290	415	2000	2800	22316K/W33	5.930	
	170	58	2.1	370	520	2000	2800	22316CA	6.590	
	170	58	2.1	375	550	2000	2800	22316CA/W33YA8	6.570	
	170	58	2.1	370	520	2000	2800	22316CA/W33	6.570	
	170	58	2.1	370	520	2000	2800	22316CAK	6.450	
	170	58	2.1	370	520	2000	2800	22316CAK/W33	6.430	
85	150	36	2	158	245	3000	3800	22217	2.770	
	150	36	2	158	245	3000	3800	22217/W33	2.720	
	150	36	2	158	245	3000	3800	22217K	2.710	
	150	36	2	158	245	3000	3800	22217K/W33	2.670	
	150	36	2	202	310	3000	3800	22217CA	2.930	
	150	36	2	202	310	3000	3800	22217CA/W33	2.880	
	150	36	2	202	310	3000	3800	22217CAK	2.880	
	150	36	2	202	310	3000	3800	22217CAK/W33	2.870	
	180	60	3	305	435	1900	2600	22317	7.330	
	180	60	3	305	435	1900	2600	22317/W33	7.270	
	180	60	3	305	435	1900	2600	22317K	7.150	
	180	60	3	385	555	1900	2600	22317CA	7.460	
	180	60	3	385	555	1900	2600	22317CA/W33	7.410	
	180	60	3	385	555	1900	2600	22317CAK	8.090	
	180	60	3	385	555	1900	2600	22317CAK/W33	7.250	
	90	160	40	2	198	305	2600	3400	22218	3.320
		160	40	2	198	305	2600	3400	22218/W33	3.230
		160	40	2	198	305	2600	3400	22218K	3.270
160		40	2	198	305	2600	3400	22218K/W33	3.180	
160		40	2	269	375	2600	3400	22218CA	3.550	
160		40	2	269	375	2600	3400	22218CA/W33	3.530	
160		40	2	269	375	2600	3400	22218CAK	3.460	
160		40	2	269	375	2600	3400	22218CAK/W33	3.480	
190		64	3	325	475	1800	2400	22318	8.620	
190		64	3	325	475	1800	2400	22318/W33	8.560	
190		64	3	325	475	1800	2400	22318K	8.430	
190		64	3	450	680	1800	2400	22318CA	8.920	
90	190	64	3	450	680	1800	2400	22318CA/W33	8.880	
	190	64	3	450	680	1800	2400	22318CAK	8.730	
	190	64	3	450	680	1800	2400	22318CAK/W33	8.690	

调心滚子轴承 Spherical Roller Bearings

外形尺寸(毫米) Boundary dimensions (mm)				基本额定负荷 (千牛) Basic load ratings (kN)		极限转速(转/分) Speed rating (rpm)		型号 Designations	重量 (千克) Weight (kg)	
d	D	B	r _{min}	Cr	Cor	脂润滑 Grease	油润滑 Oil			
90	160	52.4	2	210	365	1900	2600	23218	4.600	
	160	52.4	2	210	365	1900	2600	23218/W33	4.550	
	160	52.4	2	210	365	1900	2600	23218K	4.470	
	160	52.4	2	210	365	1900	2600	23218K/W33	4.420	
	160	52.4	2	300	500	1900	2600	23218CA	4.660	
	160	52.4	2	300	500	1900	2600	23218CA/W33	4.610	
	160	52.4	2	300	500	1900	2600	23218CAK	4.560	
	160	52.4	2	300	500	1900	2600	23218CAK/W33	4.510	
	140	50	2	254	440	1750	2200	24018CA	2.760	
	140	50	2	254	440	1750	2200	24018CA/W33	2.740	
	140	50	2	254	440	1750	2200	24018CAK	2.710	
	140	50	2	254	440	1750	2200	24018CAK/W33	2.690	
	95	170	43	2.1	238	365	2400	3200	22219	4.330
		170	43	2.1	238	365	2400	3200	22219/W33	4.300
		170	43	2.1	238	365	2400	3200	22219K	4.240
		170	43	2.1	238	365	2400	3200	22219K/W33	4.210
170		43	2.1	265	410	2400	3200	22219CA	4.260	
170		43	2.1	265	410	2400	3200	22219CA/W33	4.180	
170		43	2.1	265	410	2400	3200	22219CAK	4.190	
170		43	2.1	265	410	2400	3200	22219CAK/W33	4.130	
200		67	3	365	550	1800	2400	22319	10.400	
200		67	3	365	550	1800	2400	22319/W33	10.300	
200		67	3	365	550	1800	2400	22319K	10.100	
200		67	3	365	550	1800	2400	22319K/W33	10.000	
200		67	3	480	720	1800	2400	22319CA	10.300	
200		67	3	480	720	1800	2400	22319CA/W33	10.200	
200		67	3	480	720	1800	2400	22319CAK/W33	10.100	
100		180	46	2.1	276	430	2200	3000	22220	5.240
	180	46	2.1	276	430	2200	3000	22220/W33	5.180	
	180	46	2.1	276	430	2200	3000	22220K	5.130	
	180	46	2.1	276	430	2200	3000	22220K/W33	5.070	
	180	46	2.1	310	485	2200	3000	22220CA	5.240	
	180	46	2.1	310	485	2200	3000	22220CA/W33	5.200	
	180	46	2.1	310	485	2200	3000	22220CAK	5.200	
	180	46	2.1	310	485	2200	3000	22220CAK/W33	5.130	
	215	73	3	455	660	1700	2200	22320	13.100	

调心滚子轴承 Spherical Roller Bearings

外形尺寸(毫米) Boundary dimensions (mm)				基本额定负荷 (千牛) Basic load ratings (kN)		极限转速(转/分) Speed rating (rpm)		型号 Designations	重量 (千克) Weight (kg)
d	D	B	r _{min}	Cr	Cor	脂润滑 Grease	油润滑 Oil		
100	215	73	3	455	660	1700	2200	22320/W33	13.000
	215	73	3	455	660	1700	2200	22320K	12.800
	215	73	3	455	660	1700	2200	22320K/W33	12.700
	215	73	3	575	880	1700	2200	22320CA	13.600
	215	73	3	575	880	1700	2200	22320CA/W33	12.700
	215	73	3	575	880	1700	2200	22320CAK	13.300
	215	73	3	575	880	1700	2200	22320CAK/W33	12.400
	150	37	1.5	210	345	2200	2800	23020CA	2.360
	150	37	1.5	210	345	2200	2800	23020CA/W33	2.160
	150	37	1.5	210	345	2200	2800	23020CAK	2.290
	150	37	1.5	210	345	2200	2800	23020CAK/W33	2.090
	165	52	2	200	410	2000	2800	23120	4.560
	165	52	2	200	410	2000	2800	23120/W33	4.470
	165	52	2	200	410	2000	2800	23120K	4.400
	165	52	2	200	410	2000	2800	23120K/W33	4.330
	165	52	2	310	555	2000	2800	23120CA	4.420
	165	52	2	310	555	2000	2800	23120CA/W33	4.330
	165	52	2	310	555	2000	2800	23120CAK	4.230
	165	52	2	310	555	2000	2800	23120CAK/W33	4.140
	180	60.3	2.1	242	460	1700	2200	23220	6.930
	180	60.3	2.1	242	460	1700	2200	23220/W33	6.900
	180	60.3	2.1	242	460	1700	2200	23220K	6.740
	180	60.3	2.1	410	615	1700	2200	23220CA	6.580
	180	60.3	2.1	410	615	1700	2200	23220CA/W33	6.520
180	60.3	2.1	410	615	1700	2200	23220CAK	6.390	
180	60.3	2.1	410	615	1700	2200	23220CAK/W33	6.330	
150	50	1.5	267	345	1700	2100	24020CA/W33	3.070	
150	50	1.5	267	345	1700	2100	24020CAK	3.050	
150	50	1.5	267	345	1700	2100	24020CAK/W33	3.020	
165	65	2	345	640	1100	1600	24120CA	5.710	
165	65	2	345	640	1100	1600	24120CA/W33	5.540	
165	65	2	345	640	1100	1600	24120CAK	5.620	
165	65	2	345	640	1100	1600	24120CAK/W33	5.450	
105	175	56	2	365	585	1950	2700	23121CA	5.480
	175	56	2	365	585	1950	2700	23121CA/W33	5.460
	175	56	2	365	585	1950	2700	23121CAK	5.310

调心滚子轴承 Spherical Roller Bearings

外形尺寸(毫米) Boundary dimensions (mm)				基本额定负荷 (千牛) Basic load ratings (kN)		极限转速(转/分) Speed rating (rpm)		型号 Designations	重量 (千克) Weight (kg)
d	D	B	r _{min}	Cr	Cor	脂润滑 Grease	油润滑 Oil		
105	175	56	2	365	585	1950	2700	23121CAK/W33	5.290
110	200	53	2.1	320	515	2000	2800	22222	7.260
	200	53	2.1	320	515	2000	2800	22222/W33	7.190
	200	53	2.1	320	515	2000	2800	22222K	7.190
	200	53	2.1	320	515	2000	2800	22222K/W33	7.100
	200	53	2.1	420	685	2000	2800	22222CA	7.410
	200	53	2.1	420	685	2000	2800	22222CA/W33	7.310
	200	53	2.1	420	685	2000	2800	22222CAK	7.310
	200	53	2.1	420	685	2000	2800	22222CAK/W33	7.250
	240	80	3	570	830	1600	2000	22322	18.100
	240	80	3	570	830	1600	2000	22322/W33	17.900
	240	80	3	570	830	1600	2000	22322K	17.600
	240	80	3	570	830	1600	2000	22322K/W33	17.400
	240	80	3	655	975	1600	2000	22322CA	18.500
	240	80	3	655	975	1600	2000	22322CA/W33	18.300
	240	80	3	655	975	1600	2000	22322CAK	18.200
	240	80	3	655	975	1600	2000	22322CAK/W33	18.000
	170	45	2	200	395	2200	3000	23022	3.950
	170	45	2	200	395	2200	3000	23022/W33	3.930
	170	45	2	200	395	2200	3000	23022K	3.830
	170	45	2	200	395	2200	3000	23022K/W33	3.810
	170	45	2	265	490	2200	3000	23022CA	3.760
	170	45	2	265	490	2200	3000	23022CA/W33	3.550
	170	45	2	265	490	2200	3000	23022CAK	3.650
	170	45	2	265	490	2200	3000	23022CAK/W33	3.440
	180	56	2	206	445	1900	2600	23122	5.990
	180	56	2	206	445	1900	2600	23122/W33	5.970
	180	56	2	206	445	1900	2600	23122K	5.810
	180	56	2	355	650	1900	2600	23122CA	5.570
	180	56	2	355	650	1900	2600	23122CA/W33	5.500
	180	56	2	355	650	1900	2600	23122CAK	5.470
	180	56	2	355	650	1900	2600	23122CAK/W33	5.440
	200	69.8	2.1	315	545	1600	2000	23222	10.600
	200	69.8	2.1	315	545	1600	2000	23222/W33	10.400
	200	69.8	2.1	315	545	1600	2000	23222K	10.300
	200	69.8	2.1	315	545	1600	2000	23222K/W33	10.100

调心滚子轴承 Spherical Roller Bearings

外形尺寸(毫米) Boundary dimensions (mm)				基本额定负荷 (千牛) Basic load ratings (kN)		极限转速(转/分) Speed rating (rpm)		型号 Designations	重量 (千克) Weight (kg)
d	D	B	r _{min}	Cr	Cor	脂润滑 Grease	油润滑 Oil		
110	200	69.8	2.1	525	810	1600	2000	23222CA	10.100
	200	69.8	2.1	525	810	1600	2000	23222CA/W33	9.930
	200	69.8	2.1	525	810	1600	2000	23222CAK	10.000
	200	69.8	2.1	525	810	1600	2000	23222CAK/W33	9.830
	170	60	2	365	650	1500	2050	24022CA	5.110
	170	60	2	365	650	1500	2050	24022CA/W33	5.080
	170	60	2	365	650	1500	2050	24022CAK	5.020
	170	60	2	365	650	1500	2050	24022CAK/W33	4.990
	180	69	2	252	495	1000	1400	24122/W33	6.020
	180	69	2	455	790	1000	1400	24122CA	7.170
	180	69	2	455	790	1000	1400	24122CA/W33	6.670
	180	69	2	455	790	1000	1400	24122CAK	7.060
	180	69	2	455	790	1000	1400	24122CAK/W33	6.560
	120	215	58	2.1	380	620	1900	2600	22224
215		58	2.1	380	620	1900	2600	22224/W33	9.110
	215	58	2.1	380	620	1900	2600	22224K	9.110
	215	58	2.1	380	620	1900	2600	22224K/W33	8.990
	215	58	2.1	455	750	1900	2600	22224CA	10.400
	215	58	2.1	455	750	1900	2600	22224CA/W33	10.300
	215	58	2.1	455	750	1900	2600	22224CAK	10.300
	215	58	2.1	450	750	1900	2600	22224CAK/W33	10.100
	215	70	2.1	455	700	1900	2600	22224CAX2	10.900
	260	86	3	635	975	1400	1800	22324	22.200
	260	86	3	635	975	1400	1800	22324/W33	22.100
	260	86	3	635	975	1400	1800	22324K	21.700
	260	86	3	635	975	1400	1800	22324K/W33	21.400
	260	86	3	760	1170	1400	1800	22324CA	21.600
	260	86	3	760	1170	1400	1800	22324CA/W33	21.400
	260	86	3	760	1170	1400	1800	22324CAK	21.100
	260	86	3	760	1170	1400	1800	22324CAK/W33	20.900
	180	46	2	205	445	2000	2800	23024	4.100
	180	46	2	205	445	2000	2800	23024/W33	4.080
	180	46	2	205	445	2000	2800	23024K	3.970
	180	46	2	205	445	2000	2800	23024K/W33	3.950
	180	46	2	286	555	2000	2800	23024CA	4.250
	180	46	2	286	555	2000	2800	23024CA/W33	3.850

调心滚子轴承 Spherical Roller Bearings

外形尺寸(毫米) Boundary dimensions (mm)				基本额定负荷 (千牛) Basic load ratings (kN)		极限转速(转/分) Speed rating (rpm)		型号 Designations	重量 (千克) Weight (kg)
d	D	B	r _{min}	Cr	Cor	脂润滑 Grease	油润滑 Oil		
120	180	46	2	286	555	1900	2800	23024CAK	4.120
	180	46	2	286	555	1900	2800	23024CAK/W33	3.720
	200	62	2	296	575	1800	2400	23124	7.530
	200	62	2	296	575	1800	2400	23124/W33	7.490
	200	62	2	296	575	1800	2400	23124K	7.450
	200	62	2	296	575	1800	2400	23124K/W33	7.410
	200	62	2	430	780	1800	2400	23124CA	7.770
	200	62	2	430	780	1800	2400	23124CA/W33	7.470
	200	62	2	430	780	1800	2400	23124CAK	7.530
	200	62	2	430	780	1800	2400	23124CAK/W33	7.230
	215	76	2.1	390	700	1500	1900	23224	11.700
	215	76	2.1	390	700	1500	1900	23224/W33	11.400
130	215	76	2.1	390	700	1500	1900	23224K	11.300
	215	76	2.1	390	700	1500	1900	23224K/W33	11.000
	215	76	2.1	535	945	1500	1900	23224CA	12.300
	215	76	2.1	535	945	1500	1900	23224CA/W33	12.000
	215	76	2.1	535	945	1500	1900	23224CAK	11.900
	215	76	2.1	535	945	1500	1900	23224CAK/W33	11.700
	180	60	2	231	470	1600	2000	24024	6.330
	180	60	2	231	470	1600	2000	24024/W33	6.300
	180	60	2	355	645	1600	2000	24024CA	5.360
	180	60	2	355	645	1600	2000	24024CA/W33	5.330
	180	60	2	355	645	1600	2000	24024CAK	5.270
	180	60	2	355	645	1600	2000	24024CAK/W33	5.240
130	200	80	2	515	980	950	1200	24124CA	10.400
	200	80	2	515	980	950	1200	24124CAK	10.200
	200	80	2	515	980	950	1200	24124CAK/W33	10.200
	230	64	3	445	760	1800	2400	22226	11.500
	230	64	3	445	760	1800	2400	22226/W33	11.400
	230	64	3	445	760	1800	2400	22226K	11.300
	230	64	3	445	760	1800	2400	22226K/W33	11.200
	230	64	3	510	855	1800	2400	22226CA	11.500
	230	64	3	510	855	1800	2400	22226CA/W33	11.400
	230	64	3	510	855	1800	2400	22226CAK	11.400
	230	64	3	510	855	1800	2400	22226CAK/W33	11.200
	280	93	4	700	1110	1300	1700	22326	28.200

调心滚子轴承 Spherical Roller Bearings

外形尺寸(毫米) Boundary dimensions (mm)				基本额定负荷 (千牛) Basic load ratings (kN)		极限转速(转/分) Speed rating (rpm)		型号 Designations	重量 (千克) Weight (kg)
d	D	B	r _{min}	Cr	Cor	脂润滑 Grease	油润滑 Oil		
130	280	93	4	700	1110	1300	1700	22326/W33	28.100
	280	93	4	700	1110	1300	1700	22326K	27.600
	280	93	4	700	1110	1300	1700	22326K/W33	27.500
	280	93	4	870	1350	1300	1700	22326CA	29.700
	280	93	4	870	1350	1300	1700	22326CA/W33	29.300
	280	93	4	870	1350	1300	1700	22326CAK	29.100
	280	93	4	870	1350	1300	1700	22326CAK/W33	28.700
	200	52	2	270	575	1900	2600	23026	6.300
	200	52	2	270	575	1900	2600	23026/W33	6.270
	200	52	2	270	575	1900	2600	23026K	6.120
	200	52	2	270	575	1900	2600	23026K/W33	6.090
	200	52	2	345	640	1900	2600	23026CA	6.110
130	200	52	2	345	640	1900	2600	23026CA/W33	5.610
	200	52	2	345	640	1900	2600	23026CAK/W33	5.700
	210	64	2	325	625	1700	2200	23126	8.890
	210	64	2	325	625	1700	2200	23126/W33	8.630
	210	64	2	325	625	1700	2200	23126K	8.610
	210	64	2	325	625	1700	2200	23126K/W33	8.350
	210	64	2	450	845	1700	2200	23126CA	9.550
	210	64	2	450	845	1700	2200	23126CA/W33	9.290
	210	64	2	450	845	1700	2200	23126CAK	9.270
	210	64	2	450	845	1700	2200	23126CAK/W33	9.010
	230	80	3	430	790	1300	1700	23226	14.800
	230	80	3	430	790	1300	1700	23226/W33	14.500
130	230	80	3	430	790	1300	1700	23226K	14.300
	230	80	3	430	790	1300	1700	23226K/W33	14.100
	230	80	3	670	1070	1300	1700	23226CA	14.500
	230	80	3	670	1070	1300	1700	23226CA/W33	14.300
	230	80	3	670	1070	1300	1700	23226CAK	14.100
	230	80	3	670	1070	1300	1700	23226CAK/W33	13.900
	200	69	2	281	585	1500	1900	24026	7.640
	200	69	2	281	585	1500	1900	24026/W33	7.580
	200	69	2	465	855	1500	1900	24026CA	7.900
	200	69	2	465	855	1500	1900	24026CA/W33	7.870
	200	69	2	465	855	1500	1900	24026CAK	7.770
	200	69	2	465	855	1500	1900	24026CAK/W33	7.740

调心滚子轴承 Spherical Roller Bearings

外形尺寸(毫米) Boundary dimensions (mm)				基本额定负荷 (千牛) Basic load ratings (kN)		极限转速(转/分) Speed rating (rpm)		型号 Designations	重量 (千克) Weight (kg)
d	D	B	r _{min}	Cr	Cor	脂润滑 Grease	油润滑 Oil		
130	210	80	2	530	1030	900	1100	24126CA	11.100
	210	80	2	530	1030	900	1100	24126CA/W33	11.000
	210	80	2	530	1030	900	1100	24126CAK	10.900
	210	80	2	530	1030	900	1100	24126CAK/W33	10.800
140	250	68	3	530	855	1700	2200	22228	14.200
	250	68	3	530	855	1700	2200	22228/W33	14.100
	250	68	3	530	855	1700	2200	22228K	13.900
	250	68	3	530	855	1700	2200	22228K/W33	13.800
	250	68	3	595	1010	1700	2200	22228CA	15.500
	250	68	3	595	1010	1700	2200	22228CA/W33	15.400
	250	68	3	595	1010	1700	2200	22228CAK	15.200
	250	68	3	595	1010	1700	2200	22228CAK/W33	15.100
	300	102	4	815	1290	1100	1500	22328	34.900
	300	102	4	815	1290	1100	1500	22328/W33	34.600
	300	102	4	815	1290	1100	1500	22328K	34.100
	300	102	4	815	1290	1100	1500	22328K/W33	33.800
	300	102	4	1210	1950	1100	1500	22328CA	36.100
	300	102	4	1210	1950	1100	1500	22328CA/W33	34.600
	300	102	4	1210	1950	1100	1500	22328CAK	35.300
	300	102	4	1210	1950	1100	1500	22328CAK/W33	33.800
210	53	2	285	590	1800	2400	23028	6.800	
	53	2	285	590	1800	2400	23028/W33	6.740	
	53	2	285	590	1800	2400	23028K	6.600	
	53	2	285	590	1800	2400	23028K/W33	6.540	
	53	2	365	715	1800	2400	23028CA	6.610	
	53	2	365	715	1800	2400	23028CA/W33	6.540	
	53	2	365	715	1800	2400	23028CAK	6.410	
	53	2	365	715	1800	2400	23028CAK/W33	6.340	
	225	68	2.1	390	770	1600	2000	23128	10.900
	225	68	2.1	390	770	1600	2000	23128/W33	10.900
	225	68	2.1	390	770	1600	2000	23128K	10.700
	225	68	2.1	390	770	1600	2000	23128K/W33	10.600
225	68	2.1	530	980	1600	2000	23128CA	10.500	
	68	2.1	530	980	1600	2000	23128CA/W33	10.300	
	68	2.1	530	980	1600	2000	23128CAK	10.200	
	68	2.1	530	980	1600	2000	23128CAK/W33	9.970	

调心滚子轴承 Spherical Roller Bearings

外形尺寸(毫米) Boundary dimensions (mm)				基本额定负荷 (千牛) Basic load ratings (kN)		极限转速(转/分) Speed rating (rpm)		型号 Designations	重量 (千克) Weight (kg)	
d	D	B	r _{min}	Cr	Cor	脂润滑 Grease	油润滑 Oil			
140	250	88	3	775	1212	1200	1600	23228	18.900	
	250	88	3	775	1212	1200	1600	23228/W33	18.800	
	250	88	3	775	1212	1200	1600	23228K	18.600	
	250	88	3	775	1212	1200	1600	23228K/W33	18.500	
	250	88	3	825	1340	1200	1600	23228CA	19.200	
	250	88	3	825	1340	1200	1600	23228CA/W33	19.100	
	250	88	3	825	1340	1200	1600	23228CAK	19.000	
	250	88	3	825	1340	1200	1600	23228CAK/W33	18.900	
	210	69	2	282	610	1400	1800	24028	8.860	
	210	69	2	282	610	1400	1800	24028/W33	8.830	
	210	69	2	282	610	1400	1800	24028K	8.720	
	210	69	2	282	610	1400	1800	24028K/W33	8.690	
	210	69	2	475	900	1400	1800	24028CA	8.500	
	210	69	2	475	900	1400	1800	24028CA/W33	8.470	
	210	69	2	475	900	1400	1800	24028CAK	8.360	
	210	69	2	475	900	1400	1800	24028CAK/W33	8.330	
225	85	2.1	620	1240	850	1100	24128CA	13.000		
	85	2.1	620	1240	850	1100	24128CA/W33	13.000		
	85	2.1	620	1240	850	1100	24128CAK	12.800		
	85	2.1	620	1240	850	1100	24128CAK/W33	12.700		
	150	270	73	3	550	950	1600	2000	22230	18.500
		270	73	3	550	950	1600	2000	22230/W33	18.400
		270	73	3	550	950	1600	2000	22230K	18.100
		270	73	3	550	950	1600	2000	22230K/W33	18.000
270		73	3	700	1190	1600	2000	22230CA	19.600	
270		73	3	700	1190	1600	2000	22230CA/W33	18.900	
270		73	3	700	1190	1600	2000	22230CAK	18.900	
270		73	3	700	1190	1600	2000	22230CAK/W33	19.200	
320	108	4	910	1530	1000	1400	22330	41.500		
	108	4	910	1530	1000	1400	22330/W33	41.100		
	108	4	910	1530	1000	1400	22330K	40.600		
	108	4	910	1530	1000	1400	22330K/W33	40.200		
	108	4	1150	1850	1000	1400	22330CA	42.600		
	108	4	1150	1850	1000	1400	22330CA/W33	42.200		
	108	4	1150	1850	1000	1400	22330CAK	41.600		
	108	4	1150	1850	1000	1400	22330CAK/W33	41.200		

调心滚子轴承 Spherical Roller Bearings

外形尺寸(毫米) Boundary dimensions (mm)				基本额定负荷 (千牛) Basic load ratings (kN)		极限转速(转/分) Speed rating (rpm)		型号 Designations	重量 (千克) Weight (kg)
d	D	B	r _{min}	Cr	Cor	脂润滑 Grease	油润滑 Oil		
150	225	56	2.1	325	735	1700	2200	23030	8.430
	225	56	2.1	325	735	1700	2200	23030/W33	7.830
	225	56	2.1	325	735	1700	2200	23030K	8.190
	225	56	2.1	325	735	1700	2200	23030K/W33	7.590
	225	56	2.1	435	855	1700	2200	23030CA	8.060
	225	56	2.1	435	855	1700	2200	23030CA/W33	8.000
	225	56	2.1	435	855	1700	2200	23030CAK	7.950
	225	56	2.1	435	855	1700	2200	23030CAK/W33	7.890
	250	80	2.1	415	980	1400	1800	23130	16.700
	250	80	2.1	415	980	1400	1800	23130/W33	16.500
	250	80	2.1	415	980	1400	1800	23130K	16.100
	250	80	2.1	415	980	1400	1800	23130K/W33	15.900
	250	80	2.1	745	1230	1400	1800	23130CA	16.400
	250	80	2.1	745	1230	1400	1800	23130CA/W33	16.200
	250	80	2.1	745	1230	1400	1800	23130CAK	15.900
	250	80	2.1	745	1230	1400	1800	23130CAK/W33	15.700
	270	96	3	700	1420	1100	1500	23230	24.300
	270	96	3	700	1420	1100	1500	23230/W33	24.000
	270	96	3	700	1420	1100	1500	23230K	23.600
	270	96	3	700	1420	1100	1500	23230K/W33	23.300
	270	96	3	965	1600	1100	1500	23230CA	24.900
	270	96	3	965	1600	1100	1500	23230CA/W33	24.600
	270	96	3	965	1600	1100	1500	23230CAK	24.500
	270	96	3	965	1600	1100	1500	23230CAK/W33	24.200
	225	75	2.1	335	740	1300	1700	24030	10.600
	225	75	2.1	335	740	1300	1700	24030/W33	10.600
	225	75	2.1	335	740	1300	1700	24030K	10.400
	225	75	2.1	335	740	1300	1700	24030K/W33	10.300
	225	75	2.1	550	1040	1300	1700	24030CA	10.400
	225	75	2.1	550	1040	1300	1700	24030CA/W33	10.300
	225	75	2.1	550	1040	1300	1700	24030CAK	10.200
	225	75	2.1	550	1040	1300	1700	24030CAK/W33	10.100
	250	100	2.1	765	1500	800	1000	24130CA	19.500
	250	100	2.1	765	1500	800	1000	24130CA/W33	19.400
	250	100	2.1	765	1500	800	1000	24130CAK	19.200
	250	100	2.1	765	1500	800	1000	24130CAK/W33	19.100

调心滚子轴承 Spherical Roller Bearings

外形尺寸(毫米) Boundary dimensions (mm)				基本额定负荷 (千牛) Basic load ratings (kN)		极限转速(转/分) Speed rating (rpm)		型号 Designations	重量 (千克) Weight (kg)
d	D	B	r _{min}	Cr	Cor	脂润滑 Grease	油润滑 Oil		
160	290	80	3	645	1120	1500	1900	22232	22.500
	290	80	3	645	1120	1500	1900	22232/W33	23.500
	290	80	3	645	1120	1500	1900	22232K	23.200
	290	80	3	645	1120	1500	1900	22232K/W33	23.000
	290	80	3	770	1300	1500	1900	22232CA	23.300
	290	80	3	770	1300	1500	1900	22232CA/W33	23.000
	290	80	3	770	1300	1500	1900	22232CAK	23.000
	290	80	3	770	1300	1500	1900	22232CAK/W33	22.800
	340	114	4	900	1620	1000	1300	22332	50.300
	340	114	4	900	1620	1000	1300	22332/W33	49.800
	340	114	4	900	1620	1000	1300	22332K	49.800
	340	114	4	900	1620	1000	1300	22332K/W33	49.400
	340	114	4	1270	2060	1000	1300	22332CA	51.300
	340	114	4	1270	2060	1000	1300	22332CA/W33	50.900
	340	114	4	1270	2060	1000	1300	22332CAK	50.800
	340	114	4	1270	2060	1000	1300	22332CAK/W33	50.400
	240	60	2.1	355	775	1700	2200	23032	10.200
	240	60	2.1	355	775	1700	2200	23032/W33	10.100
	240	60	2.1	355	775	1700	2200	23032K	9.900
	240	60	2.1	355	775	1700	2200	23032K/W33	9.760
	240	60	2.1	470	940	1700	2200	23032CA	9.830
	240	60	2.1	470	940	1700	2200	23032CA/W33	9.830
	240	60	2.1	470	940	1700	2200	23032CAK	9.530
	240	60	2.1	470	940	1700	2200	23032CAK/W33	9.460
	270	86	2.1	495	975	1300	1700	23132	21.200
	270	86	2.1	495	975	1300	1700	23132/W33	21.000
	270	86	2.1	495	975	1300	1700	23132K	20.600
	270	86	2.1	495	975	1300	1700	23132K/W33	20.400
	270	86	2.1	775	1460	1300	1700	23132CA	21.000
	270	86	2.1	775	1460	1300	1700	23132CA/W33	20.700
	270	86	2.1	775	1460	1300	1700	23132CAK	20.400
	270	86	2.1	775	1460	1300	1700	23132CAK/W33	20.100
	290	104	3	600	1260	1000	1400	23232	26.500
	290	104	3	600	1260	1000	1400	23232/W33	26.200
	290	104	3	600	1260	1000	1400	23232K	25.600
	290	104	3	600	1260	1000	1400	23232K/W33	25.300

调心滚子轴承 Spherical Roller Bearings

外形尺寸(毫米) Boundary dimensions (mm)				基本额定负荷 (千牛) Basic load ratings (kN)		极限转速(转/分) Speed rating (rpm)		型号 Designations	重量 (千克) Weight (kg)
d	D	B	r _{min}	Cr	Cor	脂润滑 Grease	油润滑 Oil		
160	290	104	3	965	1770	1000	1400	23232CA	29.900
	290	104	3	965	1770	1000	1400	23232CA/W33	29.700
	290	104	3	965	1770	1000	1400	23232CAK	29.700
	290	104	3	965	1770	1000	1400	23232CAK/W33	29.500
	240	80	2.1	390	865	1100	1500	24032	12.900
	240	80	2.1	390	865	1100	1500	24032/W33	12.800
	240	80	2.1	390	865	1100	1500	24032K	12.700
	240	80	2.1	390	865	1100	1500	24032K/W33	12.600
	240	80	2.1	660	1280	1100	1500	24032CA	12.900
	240	80	2.1	660	1280	1100	1500	24032CA/W33	12.800
	240	80	2.1	660	1280	1100	1500	24032CAK	12.400
	240	80	2.1	660	1280	1100	1500	24032CAK/W33	12.300
	270	109	2.1	590	1230	700	900	24132	26.000
	270	109	2.1	590	1230	700	900	24132/W33	26.000
	270	109	2.1	590	1230	700	900	24132K	25.800
	270	109	2.1	590	1230	700	900	24132K/W33	25.700
270	109	2.1	920	1820	700	900	24132CA	25.200	
270	109	2.1	920	1820	700	900	24132CA/W33	25.100	
270	109	2.1	920	1820	700	900	24132CAK	24.800	
270	109	2.1	920	1820	700	900	24132CAK/W33	24.700	
170	310	86	4	730	1300	1300	1700	22234	28.900
	310	86	4	730	1300	1300	1700	22234/W33	27.600
	310	86	4	730	1300	1300	1700	22234K	27.600
	310	86	4	730	1300	1300	1700	22234K/W33	28.300
	310	86	4	880	1500	1300	1700	22234CA	29.000
	310	86	4	880	1500	1300	1700	22234CA/W33	28.700
	310	86	4	880	1450	1300	1700	22234CAK	28.700
	310	86	4	880	1450	1300	1700	22234CAK/W33	28.400
	360	120	4	1100	1860	950	1300	22334	60.100
	360	120	4	1100	1860	950	1300	22334/W33	59.600
	360	120	4	1100	1860	950	1300	22334K	58.800
	360	120	4	1100	1860	950	1300	22334K/W33	58.300
	360	120	4	1400	2300	950	1300	22334CA	56.800
	360	120	4	1400	2300	950	1300	22334CAK	55.800
	360	120	4	1400	2300	950	1300	22334CAK/W33	55.400
	260	67	2.1	450	985	1600	2000	23034	13.700

调心滚子轴承 Spherical Roller Bearings

外形尺寸(毫米) Boundary dimensions (mm)				基本额定负荷 (千牛) Basic load ratings (kN)		极限转速(转/分) Speed rating (rpm)		型号 Designations	重量 (千克) Weight (kg)
d	D	B	r _{min}	Cr	Cor	脂润滑 Grease	油润滑 Oil		
170	260	67	2.1	450	985	1600	2000	23034/W33	13.600
	260	67	2.1	450	985	1600	2000	23034K	13.300
	260	67	2.1	450	985	1600	2000	23034K/W33	13.200
	260	67	2.1	595	1160	1600	2000	23034CA	13.400
	260	67	2.1	595	1160	1600	2000	23034CA/W33	13.200
	260	67	2.1	595	1160	1600	2000	23034CAK	13.000
	260	67	2.1	595	1160	1600	2000	23034CAK/W33	12.800
	280	88	2.1	645	1250	1200	1600	23134	23.000
	280	88	2.1	645	1250	1200	1600	23134/W33	22.800
	280	88	2.1	645	1250	1200	1600	23134K	22.300
	280	88	2.1	645	1250	1200	1600	23134K/W33	22.100
	280	88	2.1	830	1610	1200	1600	23134CA	22.500
	280	88	2.1	830	1610	1200	1600	23134CA/W33	22.400
	280	88	2.1	830	1610	1200	1600	23134CAK	21.800
	280	88	2.1	830	1610	1200	1600	23134CAK/W33	21.700
	310	110	4	710	1480	950	1300	23234	36.100
310	110	4	710	1480	950	1300	23234/W33	35.900	
310	110	4	710	1480	950	1300	23234K	35.900	
310	110	4	710	1480	950	1300	23234K/W33	35.700	
310	110	4	1160	2080	950	1300	23234CA	38.000	
310	110	4	1160	2080	950	1300	23234CA/W33	37.800	
310	110	4	1160	2080	950	1300	23234CAK	37.800	
310	110	4	1160	2080	950	1300	23234CAK/W33	37.600	
260	90	2.1	830	1630	1000	1400	24034CA	18.000	
260	90	2.1	830	1630	1000	1400	24034CA/W33	17.900	
260	90	2.1	830	1630	1000	1400	24034CAK	17.700	
260	90	2.1	830	1630	1000	1400	24034CAK/W33	17.600	
280	109	2.1	980	2010	670	850	24134CA	26.500	
280	109	2.1	980	2010	670	850	24134CA/W33	26.400	
280	109	2.1	980	2010	670	850	24134CAK	26.100	
280	109	2.1	980	2010	670	850	24134CAK/W33	26.000	
180	320	86	4	750	1370	1300	1700	22236	31.100
	320	86	4	750	1370	1300	1700	22236/W33	29.500
	320	86	4	750	1370	1300	1700	22236K	30.400
	320	86	4	750	1370	1300	1700	22236K/W33	28.800
	320	86	4	935	1640	1300	1700	22236CA	30.500

调心滚子轴承 Spherical Roller Bearings

外形尺寸(毫米) Boundary dimensions (mm)				基本额定负荷 (千牛) Basic load ratings (kN)		极限转速(转/分) Speed rating (rpm)		型号 Designations	重量 (千克) Weight (kg)
d	D	B	r _{min}	Cr	Cor	脂润滑 Grease	油润滑 Oil		
180	320	86	4	935	1640	1300	1700	22236CA/W33	30.200
	320	86	4	935	1640	1300	1700	22236CAK	30.200
	320	86	4	935	1640	1300	1700	22236CAK/W33	29.800
	380	126	4	1180	2010	900	1200	22336	70.900
	380	126	4	1180	2010	900	1200	22336/W33	70.100
	380	126	4	1180	2010	900	1200	22336K	69.700
	380	126	4	1180	2010	900	1200	22336K/W33	68.900
	380	126	4	1540	2560	900	1200	22336CA	72.600
	380	126	4	1540	2560	900	1200	22336CA/W33	71.800
	380	126	4	1540	2560	900	1200	22336CAK	71.400
	380	126	4	1540	2560	900	1200	22336CAK/W33	70.600
	280	74	2.1	500	1110	1400	1800	23036	18.100
	280	74	2.1	500	1110	1400	1800	23036/W33	17.800
	280	74	2.1	500	1110	1400	1800	23036K	17.600
	280	74	2.1	500	1110	1400	1800	23036K/W33	17.300
	280	74	2.1	685	1360	1400	1800	23036CA	17.600
	280	74	2.1	685	1360	1400	1800	23036CA/W33	16.900
	280	74	2.1	685	1360	1400	1800	23036CAK	16.700
	280	74	2.1	685	1360	1400	1800	23036CAK/W33	16.400
	300	96	3	700	1420	1100	1500	23136	28.700
	300	96	3	700	1420	1100	1500	23136/W33	28.500
	300	96	3	700	1420	1100	1500	23136K	27.900
	300	96	3	700	1420	1100	1500	23136K/W33	27.600
	300	96	3	940	1810	1100	1500	23136CA	28.000
	300	96	3	940	1810	1100	1500	23136CA/W33	27.500
	300	96	3	940	1810	1100	1500	23136CAK	27.000
	300	96	3	940	1810	1100	1500	23136CAK/W33	26.500
	320	112	4	750	1600	900	1200	23236	39.700
	320	112	4	750	1600	900	1200	23236/W33	39.500
	320	112	4	750	1600	900	1200	23236K	38.600
	320	112	4	750	1600	900	1200	23236K/W33	38.400
	320	112	4	1270	2170	900	1200	23236CA	40.700
	320	112	4	1270	2170	900	1200	23236CA/W33	40.500
	320	112	4	1270	2170	900	1200	23236CAK	40.300
	320	112	4	1270	2170	900	1200	23236CAK/W33	40.100
	250	52	2	465	895	1700	2200	23936CA	7.800

调心滚子轴承 Spherical Roller Bearings

外形尺寸(毫米) Boundary dimensions (mm)				基本额定负荷 (千牛) Basic load ratings (kN)		极限转速(转/分) Speed rating (rpm)		型号 Designations	重量 (千克) Weight (kg)
d	D	B	r _{min}	Cr	Cor	脂润滑 Grease	油润滑 Oil		
180	250	52	2	465	895	1700	2200	23936CA/W33	7.700
	250	52	2	465	895	1700	2200	23936CAK	7.600
	250	52	2	465	895	1700	2200	23936CAK/W33	7.500
	280	100	2.1	755	1510	950	1300	24036	22.500
	280	100	2.1	755	1510	950	1300	24036/W33	22.400
	280	100	2.1	935	1800	950	1300	24036CA	22.700
	280	100	2.1	935	1800	950	1300	24036CA/W33	22.000
	280	100	2.1	935	1800	950	1300	24036CAK	22.400
	280	100	2.1	935	1800	950	1300	24036CAK/W33	22.300
	300	118	3	1160	2120	630	800	24136CA	33.000
	300	118	3	1160	2120	630	800	24136CA/W33	32.800
	300	118	3	1160	2120	630	800	24136CAK	32.500
	300	118	3	1160	2120	630	800	24136CAK/W33	32.300
	190	280	67	2.1	600	1260	978	1200	53738
340		92	4	800	1470	1200	1600	22238	37.000
	340	92	4	800	1470	1200	1600	22238/W33	36.600
	340	92	4	800	1470	1200	1600	22238K	36.200
	340	92	4	800	1470	1200	1600	22238K/W33	35.800
	340	92	4	1050	1860	1200	1600	22238CA	36.300
	340	92	4	1050	1860	1200	1600	22238CA/W33	35.600
	340	92	4	1050	1860	1200	1600	22238CAK	35.600
	340	92	4	1050	1860	1200	1600	22238CAK/W33	35.500
	400	132	5	1310	2260	850	1100	22338	82.600
	400	132	5	1310	2260	850	1100	22338/W33	81.500
	400	132	5	1310	2260	850	1100	22338K	80.900
	400	132	5	1310	2260	850	1100	22338K/W33	79.800
	400	132	5	1710	2850	850	1100	22338CA	79.500
	400	132	5	1710	2850	850	1100	22338CA/W33	78.700
	400	132	5	1710	2850	850	1100	22338CAK	77.800
	400	132	5	1710	2850	850	1100	22338CAK/W33	77.000
	290	75	2.1	560	1200	1200	1700	23038	19.600
	290	75	2.1	560	1200	1200	1700	23038/W33	19.400
	290	75	2.1	560	1200	1200	1700	23038K	19.000
	290	75	2.1	560	1200	1200	1700	23038K/W33	18.800
	290	75	2.1	730	1500	1200	1700	23038CA	18.600
	290	75	2.1	730	1500	1200	1700	23038CA/W33	18.300

调心滚子轴承 Spherical Roller Bearings

外形尺寸(毫米) Boundary dimensions (mm)				基本额定负荷 (千牛) Basic load ratings (kN)		极限转速(转/分) Speed rating (rpm)		型号 Designations	重量 (千克) Weight (kg)
d	D	B	r _{min}	Cr	Cor	脂润滑 Grease	油润滑 Oil		
190	290	75	2.1	730	1500	1200	1700	23038CAK	18.000
	290	75	2.1	730	1500	1200	1700	23038CAK/W33	17.700
	320	104	3	730	1580	1000	1400	23138	35.600
	320	104	3	730	1580	1000	1400	23138/W33	35.500
	320	104	3	730	1580	1000	1400	23138K	35.400
	320	104	3	730	1580	1000	1400	23138K/W33	35.200
	320	104	3	1100	2140	1000	1400	23138CA	34.600
	320	104	3	1100	2140	1000	1400	23138CA/W33	34.200
	320	104	3	1100	2140	1000	1400	23138CAK	33.500
	320	104	3	1100	2140	1000	1400	23138CAK/W33	33.100
	340	120	4	840	1790	850	1100	23238	46.300
	340	120	4	840	1790	850	1100	23238/W33	45.800
	340	120	4	840	1790	850	1100	23238K	44.900
	340	120	4	840	1790	850	1100	23238K/W33	44.400
	340	120	4	1320	2480	850	1100	23238CA	47.500
	340	120	4	1320	2480	850	1100	23238CA/W33	47.000
340	120	4	1320	2480	850	1100	23238CAK	46.100	
340	120	4	1320	2480	850	1100	23238CAK/W33	45.600	
260	52	2	465	935	1700	2200	23938CA	8.350	
260	52	2	465	935	1700	2200	23938CA/W33	8.250	
260	52	2	465	935	1700	2200	23938CAK	8.100	
260	52	2	465	935	1700	2200	23938CAK/W33	8.000	
290	100	2.1	605	1380	950	1300	24038	23.800	
290	100	2.1	605	1380	950	1300	24038/W33	23.000	
290	100	2.1	605	1380	950	1300	24038K	23.400	
290	100	2.1	605	1380	950	1300	24038K/W33	22.600	
290	100	2.1	990	1960	950	1300	24038CA	24.000	
290	100	2.1	990	1960	950	1300	24038CA/W33	23.200	
290	100	2.1	990	1960	950	1300	24038CAK	23.600	
290	100	2.1	990	1960	950	1300	24038CAK/W33	22.800	
320	128	3	1250	2520	600	750	24138CA	43.500	
320	128	3	1250	2520	600	750	24138CA/W33	43.300	
320	128	3	1250	2520	600	750	24138CAK	42.800	
320	128	3	1250	2520	600	750	24138CAK/W33	42.600	
200	360	98	4	940	1690	1000	1500	22240	44.200
	360	98	4	940	1690	1000	1500	22240/W33	43.200

调心滚子轴承 Spherical Roller Bearings

外形尺寸(毫米) Boundary dimensions (mm)				基本额定负荷 (千牛) Basic load ratings (kN)		极限转速(转/分) Speed rating (rpm)		型号 Designations	重量 (千克) Weight (kg)
d	D	B	r _{min}	Cr	Cor	脂润滑 Grease	油润滑 Oil		
200	360	98	4	940	1690	1000	1500	22240K	43.200
	360	98	4	940	1690	1000	1500	22240K/W33	42.200
	360	98	4	1200	2150	1000	1500	22240CA	44.200
	360	98	4	1200	2150	1000	1500	22240CA/W33	43.800
	360	98	4	1200	2150	1000	1500	22240CAK	43.800
	360	98	4	1200	2150	1000	1500	22240CAK/W33	43.200
	420	138	5	1410	2450	800	1100	22340	96.000
	420	138	5	1410	2450	800	1100	22340/W33	95.000
	420	138	5	1410	2450	800	1100	22340K	94.000
	420	138	5	1410	2450	800	1100	22340K/W33	93.000
	420	138	5	1850	3150	800	1100	22340CA	97.900
	420	138	5	1850	3150	800	1100	22340CA/W33	97.000
	420	138	5	1850	3150	800	1100	22340CAK	95.900
	420	138	5	1850	3150	800	1100	22340CAK/W33	95.000
	310	82	2.1	595	1240	1100	1600	23040	25.000
	310	82	2.1	595	1240	1100	1600	23040/W33	24.700
310	82	2.1	595	1240	1100	1600	23040K	24.300	
310	82	2.1	595	1240	1100	1600	23040K/W33	24.100	
310	82	2.1	820	1680	1100	1600	23040CA	23.900	
310	82	2.1	820	1680	1100	1600	23040CA/W33	23.700	
310	82	2.1	820	1680	1100	1600	23040CAK	23.200	
310	82	2.1	820	1680	1100	1600	23040CAK/W33	23.000	
340	112	3	760	1670	950	1300	23140	40.600	
340	112	3	760	1670	950	1300	23140/W33	40.200	
340	112	3	760	1670	950	1300	23140K	39.200	
340	112	3	760	1670	950	1300	23140K/W33	38.900	
340	112	3	1220	2370	950	1300	23140CA	43.800	
340	112	3	1220	2370	950	1300	23140CA/W33	43.500	
340	112	3	1220	2370	950	1300	23140CAK	42.500	
340	112	3	1220	2370	950	1300	23140CAK/W33	42.200	
360	128	4	860	1860	850	1100	23240	57.600	
360	128	4	945	1860	850	1100	23240/W33	57.100	
360	128	4	945	1860	850	1100	23240K	55.900	
360	128	4	945	1860	850	1100	23240K/W33	55.400	
360	128	4	1470	2810	850	1100	23240CA	53.400	
360	128	4	1470	2810	850	1100	23240CA/W33	52.900	

调心滚子轴承 Spherical Roller Bearings

外形尺寸(毫米) Boundary dimensions (mm)				基本额定负荷 (千牛) Basic load ratings (kN)		极限转速(转/分) Speed rating (rpm)		型号 Designations	重量 (千克) Weight (kg)
d	D	B	r _{min}	Cr	Cor	脂润滑 Grease	油润滑 Oil		
200	360	128	4	1470	2810	850	1100	23240CAK	52.800
	360	128	4	1470	2810	850	1100	23240CAK/W33	52.300
	280	60	2.1	575	1140	1600	2000	23940CA	11.600
	280	60	2.1	575	1140	1600	2000	23940CA/W33	11.600
	280	60	2.1	575	1140	1600	2000	23940CAK	11.400
	280	60	2.1	575	1140	1600	2000	23940CAK/W33	11.300
	310	109	2.1	685	1560	900	1200	24040	28.700
	310	109	2.1	685	1560	900	1200	24040/W33	28.600
	310	109	2.1	685	1560	900	1200	24040K	28.300
	310	109	2.1	685	1560	900	1200	24040K/W33	28.100
	310	109	2.1	1120	2240	900	1200	24040CA	32.100
	310	109	2.1	1120	2240	900	1200	24040CA/W33	31.900
	310	109	2.1	1120	2240	900	1200	24040CAK	31.600
	310	109	2.1	1120	2240	900	1200	24040CAK/W33	31.400
	340	140	3	1430	2920	560	700	24140CA	52.100
	340	140	3	1430	2920	560	700	24140CA/W33	51.900
	340	140	3	1430	2920	560	700	24140CAK	51.300
	340	140	3	1430	2920	560	700	24140CAK/W33	51.100
220	400	108	4	1200	2170	950	1300	22244	62.000
	400	108	4	1200	2170	950	1300	22244/W33	61.500
	400	108	4	1200	2170	950	1300	22244K	61.700
	400	108	4	1200	2170	950	1300	22244K/W33	60.100
	400	108	4	1420	2530	950	1300	22244CA	63.500
	400	108	4	1420	2530	950	1300	22244CA/W33	59.300
	400	108	4	1420	2530	950	1300	22244CAK	59.200
	400	108	4	1420	2530	950	1300	22244CAK/W33	58.000
	460	145	5	1680	2990	750	950	22344	120.000
	460	145	5	1680	2990	750	950	22344/W33	119.000
	460	145	5	1680	2990	750	950	22344K	118.000
	460	145	5	1680	2990	750	950	22344K/W33	117.000
	460	145	5	2120	3650	750	950	22344CA	118.000
	460	145	5	2120	3650	750	950	22344CA/W33	117.000
	460	145	5	2120	3650	750	950	22344CAK	117.000
	460	145	5	2120	3650	750	950	22344CAK/W33	116.000
	340	90	3	780	1650	1050	1500	23044	30.400
	340	90	3	780	1650	1050	1500	23044/W33	30.100

调心滚子轴承 Spherical Roller Bearings

外形尺寸(毫米) Boundary dimensions (mm)				基本额定负荷 (千牛) Basic load ratings (kN)		极限转速(转/分) Speed rating (rpm)		型号 Designations	重量 (千克) Weight (kg)
d	D	B	r _{min}	Cr	Cor	脂润滑 Grease	油润滑 Oil		
220	340	90	3	780	1650	1050	1500	23044K	29.500
	340	90	3	780	1650	1050	1500	23044K/W33	29.200
	340	90	3	985	2040	1050	1500	23044CA	31.600
	340	90	3	985	2040	1050	1500	23044CA/W33	31.300
	340	90	3	985	2040	1050	1500	23044CAK	30.700
	340	90	3	985	2040	1050	1500	23044CAK/W33	30.400
	370	120	4	1330	2430	900	1200	23144	54.800
	370	120	4	1330	2430	900	1200	23144/W33	54.500
	370	120	4	1330	2430	900	1200	23144K	54.100
	370	120	4	1330	2430	900	1200	23144K/W33	53.800
	370	120	4	1430	2830	900	1200	23144CA	54.500
	370	120	4	1430	2830	900	1200	23144CA/W33	54.100
	370	120	4	1430	2830	900	1200	23144CAK	52.900
	370	120	4	1430	2830	900	1200	23144CAK/W33	52.500
	400	144	4	1200	2410	750	950	23244	82.200
	400	144	4	1200	2410	750	950	23244/W33	81.700
	400	144	4	1200	2410	750	950	23244K	79.900
	400	144	4	1200	2410	750	950	23244K/W33	79.400
	400	144	4	1750	3350	750	950	23244CA	81.000
	400	144	4	1750	3350	750	950	23244CA/W33	80.500
	400	144	4	1750	3350	750	950	23244CAK	78.600
	400	144	4	1750	3350	750	950	23244CAK/W33	78.100
	300	60	2.1	546	1080	1500	1900	23944CA	13.000
	300	60	2.1	546	1080	1500	1900	23944CA/W33	12.700
	340	118	3	845	1910	850	1100	24044	40.000
	340	118	3	845	1910	850	1100	24044/W33	39.900
	340	118	3	845	1910	850	1100	24044K	39.400
	340	118	3	845	1910	850	1100	24044K/W33	39.300
	340	118	3	1330	2660	850	1100	24044CA	39.500
	340	118	3	1330	2660	850	1100	24044CA/W33	39.300
	340	118	3	1330	2660	850	1100	24044CAK	38.900
	340	118	3	1330	2660	850	1100	24044CAK/W33	38.700
	370	150	4	1640	3450	500	650	24144CA	67.200
	370	150	4	1640	3450	500	650	24144CA/W33	67.000
	370	150	4	1640	3450	500	650	24144CAK	66.200
	370	150	4	1640	3450	500	650	24144CAK/W33	66.000

调心滚子轴承 Spherical Roller Bearings

外形尺寸(毫米) Boundary dimensions (mm)				基本额定负荷 (千牛) Basic load ratings (kN)		极限转速(转/分) Speed rating (rpm)		型号 Designations	重量 (千克) Weight (kg)
d	D	B	r _{min}	Cr	Cor	脂润滑 Grease	油润滑 Oil		
240	440	120	4	1460	2670	900	1200	22248	84.900
	440	120	4	1460	2670	900	1200	22248/W33	83.900
	440	120	4	1460	2670	900	1200	22248K	83.900
	440	120	4	1460	2670	900	1200	22248K/W33	83.100
440	120	4	1740	3150	900	1200	22248CA	81.100	
	120	4	1740	3150	900	1200	22248CA/W33	80.100	
	120	4	1740	3150	900	1200	22248CAK	80.100	
	120	4	1740	3150	900	1200	22248CAK/W33	79.300	
500	155	5	1910	3500	670	850	22348	151.000	
	155	5	1910	3500	670	850	22348/W33	150.000	
	155	5	1910	3500	670	850	22348K	148.000	
	155	5	1910	3500	670	850	22348K/W33	147.000	
500	155	5	2440	4200	670	850	22348CA	149.000	
	155	5	2440	4200	670	850	22348CA/W33	148.000	
	155	5	2440	4200	670	850	22348CAK	146.000	
	155	5	2440	4200	670	850	22348CAK/W33	145.000	
360	92	3	835	1810	1000	1200	23048	35.000	
	92	3	835	1810	1000	1200	23048/W33	34.700	
	92	3	835	1810	1000	1200	23048K	34.700	
	92	3	835	1810	1000	1200	23048K/W33	33.700	
360	92	3	1050	2300	1000	1200	23048CA	35.200	
	92	3	1050	2300	1000	1200	23048CA/W33	34.600	
	92	3	1050	2300	1000	1200	23048CAK	34.200	
	92	3	1050	2300	1000	1200	23048CAK/W33	33.600	
400	128	4	1070	2500	850	1100	23148	67.600	
	128	4	1070	2500	850	1100	23148/W33	67.200	
	128	4	1070	2500	850	1100	23148K	66.700	
	128	4	1070	2500	850	1100	23148K/W33	66.300	
400	128	4	1580	3200	850	1100	23148CA	65.500	
	128	4	1580	3200	850	1100	23148CA/W33	65.000	
	128	4	1580	3200	850	1100	23148CAK	63.500	
	128	4	1580	3200	850	1100	23148CAK/W33	63.000	
440	160	4	1560	3200	670	850	23248	109.000	
	160	4	1560	3200	670	850	23248/W33	108.000	
	160	4	1560	3200	670	850	23248K	106.000	
	160	4	1560	3200	670	850	23248K/W33	105.000	

调心滚子轴承 Spherical Roller Bearings

外形尺寸(毫米) Boundary dimensions (mm)				基本额定负荷 (千牛) Basic load ratings (kN)		极限转速(转/分) Speed rating (rpm)		型号 Designations	重量 (千克) Weight (kg)
d	D	B	r _{min}	Cr	Cor	脂润滑 Grease	油润滑 Oil		
240	440	160	4	2370	4150	670	850	23248CA	110.000
	440	160	4	2370	4150	670	850	23248CA/W33	110.000
	440	160	4	2370	4150	670	850	23248CAK	107.000
	440	160	4	2370	4150	670	850	23248CAK/W33	106.000
320	60	2.1	635	1310	1300	1700	23948CA	13.900	
	60	2.1	635	1310	1300	1700	23948CA/W33	13.700	
	60	2.1	635	1310	1300	1700	23948CAK	13.400	
	118	3	885	2090	800	1000	24048	42.000	
360	118	3	885	2090	800	1000	24048/W33	41.800	
	118	3	885	2090	800	1000	24048K	41.300	
	118	3	885	2090	800	1000	24048K/W33	41.700	
	118	3	1400	2920	800	1000	24048CA	46.500	
360	118	3	1400	2920	800	1000	24048CA/W33	46.300	
	118	3	1400	2920	800	1000	24048CAK	45.800	
	118	3	1400	2920	800	1000	24048CAK/W33	45.600	
	160	4	1900	4000	480	600	24148CA	80.500	
400	160	4	1900	4000	480	600	24148CA/W33	80.000	
	160	4	1900	4000	480	600	24148CAK	79.100	
	160	4	1900	4000	480	600	24148CAK/W33	78.600	
	260	480	130	5	1990	3600	850	1100	22252CA
480		130	5	1990	3600	850	1100	22252CA/W33	108.000
480		130	5	1990	3600	850	1100	22252CAK	107.000
480		130	5	1990	3600	850	1100	22252CAK/W33	106.000