




单列圆柱滚子轴承  
Single-Row Cylindrical Roller Bearings

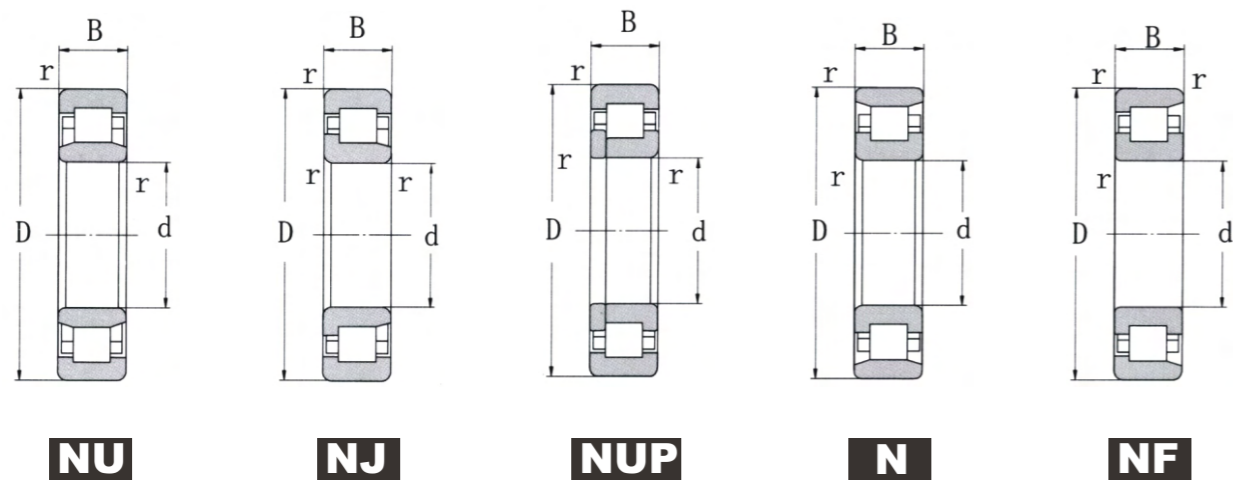

单列圆柱滚子轴承 Single-row Cylindrical Roller Bearings

外形尺寸(毫米) Boundary dimensions (mm)				基本额定负荷 (千牛) Basic load ratings (kN)		极限转速(转/分) Speed rating (rpm)		型号 Designations	重量(千克) Weight (kg)
d	D	B	r <sub>min</sub>	Cr	Cor	脂润滑 Grease	油润滑 Oil		
95	145	24	1.5	77	110	4000	5000	N1019M	1.41
	145	24	1.5	77	110	4000	5000	NU1019M	1.45
	145	24	1.5	77	110	4000	5000	NJ1019M	1.48
	170	32	2.1	170	230	3200	3800	N219M	3.05
	170	32	2.1	170	230	3200	3800	NF219M	3.05
	170	32	2.1	170	230	3200	3800	NU219M	3.11
	170	32	2.1	170	230	3200	3800	NJ219M	3.15
	170	32	2.1	200	260	3200	3800	NUP219EM	3.24
	170	43	2.1	260	380	3200	3800	N2219M	4.89
	170	43	2.1	260	380	3200	3800	NU2219M	5.12
	170	43	2.1	260	380	3200	3800	NJ2219M	4.94
	200	45	3	260	320	2400	3000	N319M	6.93
	200	45	3	260	320	2400	3000	NF319M	7.15
	200	45	3	260	320	2400	3000	NU319M	7.07
	200	45	3	255	320	2400	3000	NJ319M	7.34
	200	45	3	310	400	2400	3000	N319E	6.73
	200	45	3	310	400	2400	3000	NU319E	6.73
	200	45	3	310	400	2400	3000	NJ319E	6.83
	200	45	3	310	400	2400	3000	N319EM	7.13
	200	45	3	310	400	2400	3000	NU319EM	7.26
	200	67	3	400	550	2400	3000	N2319M	10.70
	200	67	3	400	550	2400	3000	NF2319M	10.80
	200	67	3	400	550	2400	3000	NU2319M	10.80
	200	67	3	400	550	2400	3000	NJ2319M	10.90
	200	67	3	425	600	2400	3000	NU2319E	9.88
	200	67	3	425	600	2400	3000	NU2319EM	10.90
	240	55	4	400	460	2400	3000	N419M	13.10
	240	55	4	400	460	2400	3000	NU419M	13.40
	240	55	4	400	460	2400	3000	NJ419M	14.10
	100	150	24	1.5	73.7	105	4000	4500	NU1020M
150		24	1.5	73.7	105	4000	4500	NJ1020M	1.61
	180	34	2.1	180	236	3000	3600	N220M	3.76
	180	34	2.1	180	236	3000	3600	NU220M	3.76
	180	34	2.1	180	236	3000	3600	NJ220M	3.84
	180	46	2.1	260	385	3000	3600	N2220M	5.31
	180	46	2.1	260	385	3000	3600	NJ2220M	5.52

## 单列圆柱滚子轴承 Single-row Cylindrical Roller Bearings

外形尺寸(毫米) Boundary dimensions (mm)				基本额定负荷 (千牛) Basic load ratings (kN)		极限转速(转/分) Speed rating (rpm)		型号 Designations	重量(千克) Weight (kg)
d	D	B	r <sub>min</sub>	Cr	Cor	脂润滑 Grease	油润滑 Oil		
100	180	46	2.1	260	385	3000	3600	NU2220M	5.40
	215	47	3	295	375	2200	2800	N320M	8.94
	215	47	3	295	375	2200	2800	NU320M	8.67
	215	47	3	295	375	2200	2800	NJ320M	8.99
	215	73	3	425	600	2200	2800	N2320M	13.50
	215	73	3	425	600	2200	2800	NU2320M	14.80
	215	73	3	425	600	2200	2800	NJ2320M	14.10
	215	73	3	425	600	2200	2800	NUP2320M	14.50
	250	58	4	440	550	2200	2800	NU420M	15.30
110	200	38	2.1	230	315	2600	3400	N222M	5.33
	200	38	2.1	230	315	2600	3400	NF222M	5.25
	200	38	2.1	230	315	2600	3400	NU222M	5.43
	200	38	2.1	230	315	2600	3400	NJ222M	5.53
	200	53	2.1	320	470	2600	3400	N2222M	7.52
	200	53	2.1	320	475	2600	3400	NU2222M	7.66
	200	53	2.1	320	475	2600	3400	NJ2222M	7.84
	240	50	3	375	485	1800	2400	N322M	12.00
	240	50	3	375	480	1800	2400	NF322M	12.10
	240	50	3	375	480	1800	2400	NU322M	12.00
	240	50	3	375	480	1800	2400	NJ322M	12.40
	240	50	3	400	500	1800	2400	NU322EM	11.80
	240	80	3	560	810	1800	2400	N2322M	19.30
	240	80	3	560	810	1800	2400	NU2322M	19.60
	240	80	3	560	810	1800	2400	NJ2322M	19.90
	240	80	3	590	835	1800	2400	NU2322EM	21.30
	280	65	4	500	590	1800	2400	N422M	23.10
	280	65	4	540	685	1800	2400	NU422M	22.90
280	65	4	540	685	1800	2400	NJ422M	23.40	
120	180	28	2	132	202	3200	3600	N1024M	2.58
	180	28	2	132	202	3200	3600	NU1024M	2.54
	180	28	2	132	202	3200	3600	NJ1024M	2.57
	215	40	2.1	260	365	2400	3000	N224M	10.50
	215	40	2.1	260	380	2400	3000	NF224M	6.68
	215	40	2.1	260	365	2400	3000	NU224M	6.34
	215	40	2.1	260	365	2400	3000	NJ224M	6.77
	215	58	2.1	370	580	2400	3000	N2224M	9.74

## 单列圆柱滚子轴承 Single-row Cylindrical Roller Bearings

外形尺寸(毫米) Boundary dimensions (mm)				基本额定负荷 (千牛) Basic load ratings (kN)		极限转速(转/分) Speed rating (rpm)		型号 Designations	重量(千克) Weight (kg)
d	D	B	r <sub>min</sub>	Cr	Cor	脂润滑 Grease	油润滑 Oil		
120	215	58	2.1	370	580	2400	3000	NU2224M	9.88
	215	58	2.1	370	580	2400	3000	NJ2224M	9.75
	215	58	2.1	420	635	2400	3000	N2224E	8.82
	260	55	3	465	600	1700	2200	N324M	15.20
	260	55	3	465	600	1700	2200	NF324M	15.40
	260	55	3	465	600	1700	2200	NU324M	15.20
	260	55	3	465	600	1700	2200	NJ324M	15.50
	260	86	3	660	950	1700	2200	N2324M	23.90
	260	86	3	660	950	1700	2200	NJ2324M	24.30
	310	72	5	560	700	1700	2200	N424M	29.80
	310	72	5	560	700	1700	2200	NU424M	31.40
	310	72	5	560	700	1700	2200	NJ424M	31.90
130	200	33	2	150	220	3000	3600	N1026M	3.91
	200	33	2	150	220	3000	3600	NF1026M	3.95
	200	33	2	150	220	3000	3600	NU1026M	4.01
	200	33	2	150	220	3000	3600	NJ1026M	4.05
	230	40	3	270	390	2200	2800	N226M	7.49
	230	40	3	270	390	2200	2800	NU226M	7.46
	230	40	3	270	390	2200	2800	NJ226M	7.73
	230	40	3	270	390	2200	2800	NUP226M	7.93
	230	40	3	325	440	2200	2800	NU226E	6.83
	230	40	3	325	440	2200	2800	NU226EM	7.18
	230	64	3	420	680	2200	2800	N2226M	19.80
	230	64	3	420	680	2200	2800	NU2226M	12.20
	230	64	3	420	680	2200	2800	NJ2226M	12.60
	280	58	4	520	680	1600	2000	N326M	18.60
	280	58	4	520	680	1600	2000	NF326M	18.80
	280	58	4	520	680	1600	2000	NU326M	18.90
	280	58	4	520	680	1600	2000	NJ326M	19.20
	280	93	4	770	1140	1600	2000	N2326M	30.10
280	93	4	770	1140	1600	2000	NU2326M	30.30	
280	93	4	770	1140	1600	2000	NJ2326M	31.20	
280	93	4	770	1140	1600	2000	NUP2326M	31.60	
340	78	5	760	980	1700	2000	N426M	39.10	
340	78	5	760	980	1700	2000	NU426M	39.40	
340	78	5	760	980	1700	2000	NJ426M	39.90	

## 单列圆柱滚子轴承 Single-row Cylindrical Roller Bearings

外形尺寸(毫米) Boundary dimensions (mm)				基本额定负荷 (千牛) Basic load ratings (kN)		极限转速(转/分) Speed rating (rpm)		型号 Designations	重量(千克) Weight (kg)
d	D	B	r <sub>min</sub>	Cr	Cor	脂润滑 Grease	油润滑 Oil		
140	210	33	2	170	263	2800	3200	N1028M	4.11
	210	33	2	170	263	2800	3200	NF1028M	4.15
	210	33	2	170	263	2800	3200	NU1028M	4.19
	210	33	2	170	263	2800	3200	NJ1028M	4.31
	250	42	3	320	460	2000	2600	N228M	9.41
	250	42	3	320	460	2000	2600	NU228M	9.46
	250	42	3	320	460	2000	2600	NJ228M	9.64
	250	68	3	480	760	2000	2600	NJ2228M	16.10
	250	68	3	480	760	2000	2600	N2228M	15.10
	250	68	3	480	760	2000	2600	NU2228M	15.20
	300	62	4	570	760	1800	2200	N328M	22.70
	300	62	4	570	760	1800	2200	NF328M	23.10
	300	62	4	570	760	1800	2200	NU328M	22.90
	300	62	4	570	760	1800	2200	NJ328M	23.30
150	225	35	2.1	180	285	2200	2600	NU1030M	5.04
	225	35	2.1	180	285	2200	2600	NJ1030M	5.21
	270	45	3	360	540	1900	2400	N230M	11.90
	270	45	3	360	540	1900	2400	NF230M	11.10
	270	45	3	360	540	1900	2400	NU230M	12.20
	270	45	3	360	540	1900	2400	NJ230M	12.40
	270	45	3	360	540	1900	2400	NUP230M	12.60
	270	73	3	600	980	1900	2400	NU2230M	19.20
	270	73	3	600	980	1900	2400	NJ2230M	20.10
	320	65	4	630	840	1700	2000	N330M	27.30
	320	65	4	630	840	1700	2000	NF330M	27.80
	320	65	4	630	840	1700	2000	NU330M	27.20
	320	65	4	630	840	1700	2000	NJ330M	28.10
	320	108	4	940	1420	1700	2000	N2330M	45.10
320	108	4	940	1420	1700	2000	NF2330M	44.90	

## 单列圆柱滚子轴承 Single-row Cylindrical Roller Bearings

外形尺寸(毫米) Boundary dimensions (mm)				基本额定负荷 (千牛) Basic load ratings (kN)		极限转速(转/分) Speed rating (rpm)		型号 Designations	重量(千克) Weight (kg)
d	D	B	r <sub>min</sub>	Cr	Cor	脂润滑 Grease	油润滑 Oil		
150	320	108	4	940	1420	1700	2000	NU2330M	45.40
	320	108	4	940	1420	1700	2000	NJ2330M	46.30
	380	85	5	930	1200	1500	1800	NU430M	55.80
160	240	38	2.1	220	350	2200	2800	NU1032M	6.20
	240	38	2.1	220	350	2200	2800	NJ1032M	6.53
	290	48	3	420	630	1800	2200	N232M	10.60
	290	48	3	420	630	1800	2200	NU232M	14.90
	290	48	3	420	630	1800	2200	NJ232M	15.10
	290	48	3	420	630	1800	2200	NUP232M	14.90
	290	80	3	700	1150	1800	2200	NJ2232M	25.40
	340	68	4	660	920	1500	1800	N332M	31.70
	340	68	4	660	920	1500	1800	NF332M	32.40
	340	114	4	990	1550	1500	1800	NU2332M	54.20
170	260	42	2.1	260	410	2000	2600	NU1034M	8.18
	260	42	2.1	260	410	2000	2600	NJ1034M	8.39
	310	52	4	480	730	1600	2000	N234M	18.40
	310	52	4	480	730	1600	2000	NF234M	18.60
	310	52	4	480	730	1600	2000	NU234M	18.30
	310	52	4	480	730	1600	2000	NJ234M	18.60
	310	52	4	480	730	1600	2000	NUP234M	19.10
	360	72	4	760	1040	1500	1800	N334M	36.60
	360	72	4	760	1040	1500	1800	NF334M	37.70
	360	72	4	760	1040	1500	1800	NU334M	37.10
	360	72	4	760	1040	1500	1800	NJ334M	38.10
	360	120	4	1120	1780	1300	1600	NU2334M	64.70
	360	120	4	1120	1780	1300	1600	NUP2334M	67.40
	180	280	46	2.1	330	530	1800	2400	NU1036M
280		46	2.1	330	530	1800	2400	NJ1036M	11.40
320		52	4	480	740	1600	1900	N236M	18.90
320		52	4	480	740	1600	1900	NU236M	19.00
320		52	4	480	740	1600	1900	NJ236M	19.40
320		52	4	480	740	1600	1900	NUP236M	19.90
320		86	4	880	1400	1600	1900	NU2236M	31.50
320		86	4	880	1400	1600	1900	NJ2236M	31.90
380		75	4	830	1200	1400	1700	N336M	39.70

## 单列圆柱滚子轴承 Single-row Cylindrical Roller Bearings

外形尺寸(毫米) Boundary dimensions (mm)				基本额定负荷 (千牛) Basic load ratings (kN)		极限转速(转/分) Speed rating (rpm)		型号 Designations	重量(千克) Weight (kg)
d	D	B	r <sub>min</sub>	Cr	Cor	脂润滑 Grease	油润滑 Oil		
180	380	75	4	830	1200	1400	1700	NU336M	39.90
	380	126	4	1400	2000	1400	1700	NU2336M	73.90
	380	126	4	1400	2000	1400	1700	NJ2336M	74.90
190	290	46	2.1	340	510	1800	2400	NU1038M	11.00
	340	55	4	540	840	1500	1800	N238M	22.90
	340	55	4	540	840	1500	1800	NU238M	23.30
	340	55	4	540	840	1500	1800	NJ238M	23.80
	340	55	4	540	840	1500	1800	NUP238M	24.40
	340	92	4	940	1500	1500	1800	NU2238M	38.40
200	400	78	5	1000	1500	1100	1400	N338M	50.40
	400	78	5	1000	1500	1100	1400	NU338M	51.10
	400	132	5	1500	2200	1100	1400	NU2338M	85.20
	310	51	2.1	370	600	1800	2200	N1040M	13.20
	310	51	2.1	370	600	1800	2200	NF1040M	13.20
	310	51	2.1	370	600	1800	2200	NU1040M	15.10
220	310	51	2.1	370	600	1800	2200	NJ1040M	14.40
	360	58	4	610	960	1400	1700	N240M	27.30
	360	58	4	610	960	1400	1700	NF240M	27.30
	360	58	4	610	960	1400	1700	NU240M	27.50
	360	58	4	610	960	1400	1700	NJ240M	28.00
	420	80	5	980	1300	1200	1500	NU340M	56.10
	420	138	5	1570	2530	1200	1500	N2340M	102.00
	420	138	5	1570	2530	1200	1500	NU2340M+HJ2340	107.00
	340	56	3	450	730	1700	2000	NU1044M	19.00
	340	56	3	450	730	1700	2000	NJ1044M	19.60
	400	65	4	730	1050	1400	1700	N244M	38.90
	400	65	4	730	1050	1400	1700	NU244M	38.60
400	65	4	730	1150	1400	1700	NJ244M	41.10	
400	65	4	730	1150	1400	1700	NUP244M	40.10	
400	108	4	1280	2200	1200	1500	NU2244EM	71.20	
400	108	4	1280	2200	1200	1500	NUP2244EM	73.70	
460	88	5	1100	1600	1100	1300	NU344M	74.90	
460	88	5	1100	1600	1100	1300	NJ344M	78.00	
460	145	5	1890	3080	900	1200	NU2344M	125.00	
240	360	56	3	570	1010	1600	1900	NU1048M	20.20
	360	56	3	570	1010	1600	1900	NJ1048M	20.80

## 单列圆柱滚子轴承 Single-row Cylindrical Roller Bearings

外形尺寸(毫米) Boundary dimensions (mm)				基本额定负荷 (千牛) Basic load ratings (kN)		极限转速(转/分) Speed rating (rpm)		型号 Designations	重量(千克) Weight (kg)
d	D	B	r <sub>min</sub>	Cr	Cor	脂润滑 Grease	油润滑 Oil		
240	440	72	4	880	1380	1200	1500	N248M	51.60
	440	72	4	880	1380	1200	1500	NU248M	52.70
	440	72	4	880	1380	1200	1500	NJ248M	50.90
260	500	95	5	1300	2000	950	1200	NU348M	97.10
	400	65	4	740	1340	1400	1700	N1052M	30.80
	400	65	4	740	1340	1400	1700	NU1052M	35.60
280	400	65	4	740	1340	1400	1700	NJ1052M	36.30
	480	80	5	1100	1800	1000	1300	NU252M	70.30
	480	130	5	1600	2900	1000	1300	NU2252M	113.00
	420	65	4	600	1100	1200	1500	NU1056M	29.80
300	500	80	5	1100	1800	1000	1300	NJ256M	72.20
	460	74	4	840	1350	1000	1400	NU1060M	45.10
	460	74	4	840	1350	1000	1400	NJ1060M	46.30
320	540	85	5	1300	2100	800	1000	NU260M	87.20
	480	74	4	860	1550	900	1100	NU1064M	49.10
340	520	82	5	1040	1860	800	1000	NU1068M	66.30